



X[®] FORCE[™]

Specially designed for civil or military vehicles that drive on all terrains and require maximum mobility.

MICHELIN OFF-ROAD TYRES DATA BOOK

2ND EDITION



IN THE MOST EXTREME CONDITIONS, RUNNING ON MICHELIN MEANS

Being equipped with tyres

designed and homologated according to your specifications, thanks to Michelin's partnership with all off-road vehicles manufacturers



Choosing from a comprehensive range of products

- For all types of vehicles and all conditions of use

Relying on a specialised team

experienced in the requirements of the off-road activity



Enjoying technological innovations from a global manufacturer

- All-terrain tyres on radial casings, patented tread patterns and concept solutions.

Benefitting from minimum running costs

- High mileage potential, damage resistance and reliability of Michelin casings
- Through the tyre's life, Michelin offers best value while affording high levels of damage resistance and survivability



Counting on worldwide assistance

- Availability of Michelin tyres and technical support on five continents



XZL[™]/XZL[™]+/X[®] FORCE[™]

The all-terrain, all position radial tyre for mobility in all conditions

- Deep, open tread pattern and shoulders giving excellent traction for mobility on snow, sand, mud, tracks and highway
- Strong casing allowing high load capacity and runflat capability (Finabel test) for mobility and security
- Tubeless construction compatible with Central Tyre Inflation Systems and Bead locks
- Designed to allow the use of chains, micro-siping and studs



XZL[™] WIDE BASE

The all-position wide base radial designed for optimized on/off road traction

- All-terrain capability
- Self-cleaning tread pattern
- Good wear forms due to the stable block design, even on free-rolling axles
- Aggressions resistance provided by a specific compound



XZL 2[™]

The all terrain, all position radial tyre designed for on and off road mobility up to 110 km/h

- Low operating temperature allowing long distance to be covered at sustained speed
- Flat tread pattern and improved tread compound giving longevity on road
- Large contact patch for optimum floatation on sand
- Tubeless construction compatible with Central Tyre Inflation Systems and bead locks



XML[™]

The all-terrain, all-position radial optimized for soft soil/mud mobility

- Exceptional soft soil mobility, through self-cleaning capabilities and offset shoulder designed
- Belt protection helps protect the casing from bruising and penetrations



XS[™]

The all-terrain, all-position radial optimized for sand mobility

- Large contact patch for optimum floatation on sand
- Flexible casing and tread pattern for being driven at low pressures
- Rigid shoulders to ensure optimum steering on roads and tracks

MICHELIN OFF-ROAD TYRE SPECIFICATIONS



XZL™/XZL™+X® FORCE™

| SIZE | TREAD | M+S | RECOMMENDED MEASURING & OPTIONAL RIMS | FLAP & TUBE, OR TUBELESS | MASS | TREAD DEPTH | OVERALL WIDTH | OVERALL DIAMETER | STATIC LADEN RADIUS | REVOLUTIONS PER MILE |
|--|---|--------------------|--|--------------------------------|----------------------------------|-------------|------------------|---------------------|---------------------------|-------------------------|
| TL, TT OR TL* (*MAY BE USED WITH TUBE) | LOAD & SPEED INDEX UNIQUE POINT | | RUNNING CONDITIONS SINGLE OR DUAL MOUNT | | MAXIMUM LOAD & PRESSURE PER TYRE | | MAXIMUM SPEED | | FOOTPRINT | |
| | | | | | KG / KPA | BAR | PSI | KM/H | MPH | CM2 |
| 7.50 R 16 TL | XZL™ 116N | YES | Measuring 6.00J | 16J13 TUBELESS | 20.8 kg | 13 mm | 216 mm | 814 mm | 373 mm | 657 |
| | | | Road | S | 1250 | 5.25 | 76 | 140 | 87 | 301 |
| | | | Road | D | 1180 | 5.25 | 76 | 140 | 87 | 301 |
| | | | Cross Country | S | 1250 | 3.4 | 49 | 65 | 40 | — |
| | | | Mud and Sand | S | 1250 | 2.1 | 30 | 20 | 12 | — |
| 255/100 R 16 (9.00 R 16) TL* | XZL™ 126 K (134 J) | YES | Measuring 6.50 H Optional 6.00G | 170-16L | 39.9 kg | 16.5 mm | 255 mm | 923 mm | 426 mm | 573 |
| | | | Road | S | 1700 | 4.5 | 65 | 110 | 68 | 437 |
| | | | Road | D | — | — | — | — | — | — |
| | | | Cross Country | S | 1700 | 2.9 | 40 | 70 | 43 | 577 |
| | | | Mud and Sand | S | 1700 | 1.7 | 25 | 30 | 19 | 833 |
| 11.00 R 16 TL* | XZL™ 135 K | YES ⁽¹⁾ | Measuring 6.50H | 16x6.00 16P | 50.7 kg | 17.5 mm | 287 mm | 984 mm | 455 mm | 536 |
| | | | Road | S | 2180 | 5.5 | 80 | 110 | 68 | 583 |
| | | | Road | D | — | — | — | — | — | — |
| | | | Cross Country | S | 2180 | 3.2 | 45 | 70 | 43 | 756 |
| | | | Mud and Sand | S | 2180 | 1.7 | 25 | 30 | 19 | 1010 |
| 325/85 R 16 TL | X® FORCE™ 140K LAUNCH SEPT. 2014 | YES | Measuring 9.00 | TUBELESS | 54 kg | 17 mm | 328 mm | 985 mm | 449 mm | 539 |
| | | | Road | S | 2500 | 5.0 | 73 | 110 | 68 | 564 |
| | | | Road | D | — | — | — | — | — | — |
| | | | Cross Country | S | 2500 | 3.3 | 47 | 65 | 40 | — |
| | | | Mud and Sand | S | 2500 | 1.8 | 25 | 20 | 12 | — |
| 275/80 R 20 (10.5 R 20) TL* | XZL™ MPT 128 K | YES | Measuring 9.00 | 240-20L, 230-20L 20P15, 20P | 32,8 kg | 15.2 mm | 280 mm | 939 mm | 431 mm | 565 |
| | | | Road | S | 1800 | 4.2 | 61 | 110 | 68 | 476 |
| | | | Road | D | — | — | — | — | — | — |
| | | | Cross Country | S | 1800 | 2.7 | 40 | 65 | 40 | 590 |
| | | | Mud and Sand | S | 1800 | 2 | 30 | 20 | 12 | 695 |
| 335/80 R 20 (12.5 R 20) TL* | XZL™ MPT 141 K | YES | Measuring 11-20 Optional 9, 9 SDC, W9, W10, DW10, 11 SDC, W11, DW11, 12, 12 SDC | 20x10.00 20P | 55.1 Kg | 17.8 mm | 345 mm | 1037 mm | 473 mm | 512 |
| | | | Road | S | 2575 | 4.3 | 62 | 110 | 86 | 715 |
| | | | Road | D | — | — | — | — | — | — |
| | | | Cross Country | S | 2575 | 3.7 | 54 | 70 | 43 | 771 |
| | | | Mud and Sand | S | 2575 | 1.9 | 30 | 30 | 19 | 1082 |
| 365/80 R 20 (14.5 R 20) TL* | XZL™ MPT 152 K | YES | Measuring 11.00 | 320-20L 20Q | 70.1 kg | 19.9 mm | 372 mm | 1096 mm | 501 mm | 483 |
| | | | Road | S | 3550 | 6.0 | 87 | 110 | 68 | 777 |
| | | | Road | D | — | — | — | — | — | — |
| | | | Cross Country | S | 3550 | 4.7 | 68 | 65 | 40 | 880 |
| | | | Mud and Sand | S | 3550 | 2.4 | 35 | 20 | 12 | 1244 |
| 365/85 R 20 TL* | XZL™ 164 G | YES | Measuring 10.0 | 280-20L 20S | 86.8Kg | 22.5 mm | 368 mm | 1144 mm | 520 mm | 465 |
| | | | Road | S | 5000 | 7.5 | 109 | 90 | 55 | 857 |
| | | | Road | D | — | — | — | — | — | — |
| | | | Cross Country | S | 3250 | 3.8 | 55 | 65 | 40 | 943 |
| | | | Mud and Sand | S | 3250 | 2.1 | 30 | 20 | 12 | 1257 |


| SIZE | TREAD | M+S | RECOMMENDED MEASURING & OPTIONAL RIMS | FLAP & TUBE, OR TUBELESS | MASS | TREAD DEPTH | OVERALL WIDTH | OVERALL DIAMETER | STATIC LADEN RADIUS | REVOLUTIONS PER MILE |
|--|---------------------------------------|--------------------|--|--------------------------------|----------------------------------|-------------|------------------|---------------------|---------------------------|-------------------------|
| TL, TT OR TL* (*MAY BE USED WITH TUBE) | LOAD & SPEED INDEX UNIQUE POINT | | RUNNING CONDITIONS SINGLE OR DUAL MOUNT | | MAXIMUM LOAD & PRESSURE PER TYRE | | | MAXIMUM SPEED | | FOOTPRINT |
| | | | | | KG / KPA | BAR | PSI | KM/H | MPH | CM2 |
| 395/85 R 20 TL* | XZL™ 168 G (161 J) | YES | Measuring 10.00W Optional 10.00 | 280-20L 20S | 102 kg | 25.8 mm | 388 mm | 1189 mm | 542 mm | 447 |
| | | | Road | S | 5600 | 8.5 | 123 | 90 | 55 | 932 |
| | | | Road | D | — | — | — | — | — | — |
| | | | Cross Country | S | 3650 | 3.6 | 52 | 65 | 40 | 1110 |
| | | | Mud and Sand | S | 3650 | 2.1 | 30 | 20 | 12 | 1432 |
| 10.00 R 20 TT | XZL™ 146/143 K | YES | Measuring 7.5 | 200-20L 20N | 53 kg | 17.3 mm | 281 mm | 1060 mm | 493 mm | 497 |
| | | | Road | S | 3000 | 8.0 | 116 | 110 | 68 | 500 |
| | | | Road | D | 2725 | 8.0 | 116 | 110 | 68 | 500 |
| | | | Cross Country | S | 1950 | 2.9 | 42 | 65 | 40 | 615 |
| | | | Mud and Sand | S | 1950 | 1.5 | 22 | 20 | 12 | 799 |
| 11.00 R 20 TL* | XZL™ 150/146 K | YES ⁽¹⁾ | Measuring 8.00 Optional 8.50, 7.50 | 220-20L 20P | 65 kg | 18 mm | 299 mm | 1092 mm | 508 mm | 482 |
| | | | Road | S | 3350 | 8.0 | 116 | 110 | 68 | 546 |
| | | | Road | D | 3000 | 8.0 | 116 | 110 | 68 | 546 |
| | | | Cross Country | S | 2200 | 2.9 | 40 | 65 | 40 | 700 |
| | | | Mud and Sand | S | 2200 | 1.5 | 20 | 20 | 12 | 931 |
| 12.00 R 20 TL* | XZL™ 154/149 K | YES | Measuring 8.50 Optional 7.50, 8.0, 9.0 | 240-20L 20Q | 75 kg | 18.7 mm | 311 mm | 1131 mm | 527 mm | 465 |
| | | | Road | S | 3750 | 8.5 | 123 | 110 | 68 | 611 |
| | | | Road | D | 3750 | 8.5 | 123 | 110 | 68 | 611 |
| | | | Cross Country | S | 2450 | 2.8 | 41 | 65 | 40 | 831 |
| | | | Mud and Sand | S | 2450 | 1.5 | 22 | 20 | 12 | 1122 |
| 14.00 R 20 TL* | XZL™+ 164/160 J (166 G) | YES | Measuring 10.00W Optional 10.00, 10.00V | 20x10.00 20S | 104 kg | 22.3 mm | 386 mm | 1258 mm | 578 mm | 420 |
| | | | Road | S | 5000 | 7.6 | 110 | 100 | 62 | 983 |
| | | | Road | D | 4500 | 7.6 | 110 | 100 | 62 | 933 |
| | | | Cross Country | S | 5000 | 5.5 | 80 | 70 | 40 | 1240 |
| | | | Mud and Sand | S | 5000 | 3.3 | 50 | 30 | 12 | 1657 |
| 16.00 R 20 TL* | XZL™ 173 G | NO | Measuring 10.00W Optional 10.0V, 10.00 | 20x10.00 20V | 150.3 kg | 27 mm | 438 mm | 1343 mm | 609 | 393 |
| | | | Road | S | 6500 | 7.5 | 109 | 90 | 56 | 1288 |
| | | | Road | D | — | — | — | — | — | — |
| | | | Cross Country | S | 4500 | 3.4 | 49 | 70 | 43 | 1496 |
| | | | Mud and Sand | S | 4500 | 1.8 | 26 | 30 | 19 | 1959 |
| 24 R 21 TL | XZL™ 176 G | YES | Measuring 18.00 | TUBELESS | 186,5 kg | 25 mm | 608 mm | 1388 mm | 631 mm | 383 |
| | | | Road | S | 7100 | 6.0 | 87 | 90 | 56 | 1675 |
| | | | Road | D | — | — | — | — | — | — |
| | | | Cross Country | S | 5500 | 3.1 | 45 | 65 | 40 | 2072 |
| | | | Mud and Sand | S | 5500 | 1.6 | 25 | 20 | 12 | 2898 |
| 13 R 22.5 TL | XZL™ 154/150 K | YES ⁽¹⁾ | Measuring 9.00 | TUBELESS | 80 kg | 20.2 mm | 307 mm | 1130 mm | 525 mm | 470 |
| | | | Road | S | 3750 | 8 | 115 | 110 | 68 | 637 |
| | | | Road | D | 3350 | 8 | 115 | 110 | 68 | 595 |
| | | | Cross Country | S | 3250 | 5.1 | 74 | 70 | 43 | 780 |
| | | | Mud and Sand | S | 3750 | 3.9 | 55 | 30 | 19 | 1037 |

All the pressures are given for nominal conditions. Extension of use may be allowed for specific needs. Please contact your Michelin sales representative.

⁽¹⁾ M+S marking by end 2014.

MICHELIN OFF-ROAD TYRE SPECIFICATIONS



| SIZE | TREAD | M+S | RECOMMENDED MEASURING & OPTIONAL RIMS | FLAP & TUBE, OR TUBELESS | MASS | TREAD DEPTH | OVERALL WIDTH | OVERALL DIAMETER | STATIC LADEN RADIUS | REVOLUTIONS PER MILE |
|---|---------------------------------------|--------------------|--|----------------------------------|----------|-------------|------------------|---------------------|---------------------------|-------------------------|
| TL, TT OR TL* (*MAY BE USED WITH TUBE) | LOAD & SPEED INDEX UNIQUE POINT | | RUNNING CONDITIONS SINGLE OR DUAL MOUNT | MAXIMUM LOAD & PRESSURE PER TYRE | | | MAXIMUM SPEED | | FOOTPRINT | |
| | | | | KG / KPA | BAR | PSI | KM/H | MPH | | CM2 |
| 425/65 R 22.5 TL | XZL™ (WB) 165 G | YES ⁽¹⁾ | Measuring 13.00 Optional 14.00 | TUBELESS | 101.7 kg | 20.6 mm | 421 mm | 1139 mm | 524 mm | 467 |
| | | | Road | S | 5150 | 8.3 | 120 | 90 | 56 | 760 |
| | | | Road | D | — | — | — | — | — | — |
| | | | Cross Country | S | 3350 | 4.1 | 60 | 65 | 40 | 872 |
| | | | Mud and Sand | S | 3350 | 2.3 | 35 | 20 | 12 | 1209 |
| 445/65 R 22.5 TL | XZL™ (WB) 168 G | YES ⁽¹⁾ | Measuring 14.00 | TUBELESS | 116 kg | 21 mm | 448 mm | 1168 mm | 537 | 453 |
| | | | Road | S | 5600 | 8.0 | 116 | 90 | 56 | 1037 |
| | | | Road | D | — | — | — | — | — | — |
| | | | Cross Country | S | 3800 | 4.0 | 60 | 65 | 40 | 1151 |
| | | | Mud and Sand | S | 3800 | 2.3 | 35 | 20 | 12 | 1453 |
|  | | | | | | | | | | |
| 395/85 R 20 TL* | XZL 2™ 168 K (164 L) | YES | Measuring 10.00W Optional 10.00, 10.00V | 20x10.00 20S | 94 kg | 20 mm | 388 mm | 1176 mm | 534 mm | 449 |
| | | | Road | S | 5600 | 8.5 | 120 | 110 | 68 | 913 |
| | | | Road | D | — | — | — | — | — | — |
| | | | Cross Country | S | 3640 | 3.6 | 52 | 70 | 43 | 1155 |
| | | | Mud and Sand | S | 3640 | 2.1 | 30 | 30 | 19 | 1584 |
|  | | | | | | | | | | |
| 325/85 R 16 TL | XML™ 137J (134K) | YES ⁽¹⁾ | Measuring 9.00 | TUBELESS | 55.5 kg | 16.5 mm | 327 mm | 984 mm | 449 mm | 540 |
| | | | Road | S | 2300 | 4.5 | 65 | — | — | — |
| | | | Road | D | — | — | — | — | — | — |
| | | | Cross Country | S | 2300 | 3.1 | 45 | 70 | 43 | 831 |
| | | | Mud and Sand | S | 2300 | 1.6 | 25 | 30 | 19 | 1140 |
| 475/80 R 20 TL | XML™ 166 G | YES | Measuring 14.0V | TUBELESS | 130 kg | 23.5 mm | 480 mm | 1272 mm | 581 mm | 417 |
| | | | Road | S | 5300 | 6.0 | 87 | 90 | 55 | 1141 |
| | | | Road | D | — | — | — | — | — | — |
| | | | Cross Country | S | 4000 | 2.9 | 40 | 70 | 43 | 1572 |
| | | | Mud and Sand | S | 4000 | 1.6 | 25 | 30 | 19 | 2108 |
| 395/85 R 20 TL | XML™ 161 G | YES ⁽¹⁾ | Measuring 10.0W Optional 10.00 | 280-20L 20S | 92.5Kg | 23.7 mm | 385 mm | 1187 mm | 543 mm | 447 |
| | | | Road | S | 4625 | 7.0 | 102 | 90 | 56 | 874 |
| | | | Road | D | — | — | — | — | — | — |
| | | | Cross Country | S | 4625 | 4.8 | 70 | 70 | 43 | 1219 |
| | | | Mud and Sand | S | 4625 | 2.8 | 40 | 30 | 19 | 1619 |



| SIZE | TREAD | M+S | RECOMMENDED MEASURING & OPTIONAL RIMS | FLAP & TUBE, OR TUBELESS | MASS | TREAD DEPTH | OVERALL WIDTH | OVERALL DIAMETER | STATIC LADEN RADIUS | REVOLUTIONS PER MILE |
|--|---------------------------------------|--------------------|--|--------------------------------|----------------------------------|-------------|------------------|---------------------|---------------------------|-------------------------|
| TL, TT OR TL* (*MAY BE USED WITH TUBE) | LOAD & SPEED INDEX UNIQUE POINT | | RUNNING CONDITIONS SINGLE OR DUAL MOUNT | | MAXIMUM LOAD & PRESSURE PER TYRE | | | MAXIMUM SPEED | | FOOTPRINT |
| | | | | | KG / KPA | BAR | PSI | KM/H | MPH | CM2 |
| 12.00 R 20 TL* | XML™ 149/146 J | YES ⁽¹⁾ | Measuring 8.50 Optional 8.00, 7.50, 9.0 | 20x8.50 20Q | 76Kg | 19.5 mm | 308 mm | 1131 mm | 526 mm | 467 |
| | | | Road | S | 3250 | 7.2 | 105 | 100 | 62 | 787 |
| | | | Road | D | 3000 | 7.2 | 105 | 100 | 62 | 761 |
| | | | Cross Country | S | 3250 | 4.1 | 60 | 70 | 43 | 997 |
| | | | Mud and Sand | S | 3250 | 2.3 | 35 | 30 | 19 | 1292 |
| 14.00 R 20 TL | XML™ 153 G (149 K) | YES | Measuring 10.00W Optional 9.0, 10.00V, 10.0 | 230-20L 20S | 98.2 kg | 24.4 mm | 383 mm | 1258 mm | 581 mm | 420 |
| | | | Road | S | 3650 | 6.25 | 90 | 90 | 56 | 935 |
| | | | Road | D | — | — | — | — | — | — |
| | | | Cross Country | S | 3650 | 3.5 | 50 | 65 | 40 | 1458 |
| | | | Mud and Sand | S | 3650 | 1.6 | 25 | 20 | 12 | 2273 |
| 395/90 R 560 TL | XML™ 154K (156 F) | YES | Measuring 240 TR | TUBELESS | 101.7 kg | 24.4 mm | 392 mm | 1256 mm | 582 mm | 420 |
| | | | Road | S | 3750 | 6.4 | 90 | 110 | 68 | 810 |
| | | | Road | D | — | — | — | — | — | — |
| | | | Cross Country | S | 3750 | 3.5 | 50 | 70 | 43 | 1267 |
| | | | Mud and Sand | S | 3750 | 1.7 | 25 | 30 | 19 | 1794 |
| 415/80 R 685 TL | XML™ 160 K | YES ⁽¹⁾ | Measuring 230 - 685TR | TUBELESS | 102 kg | 22.5 mm | 404 mm | 1330 mm | 613 mm | 395 |
| | | | Road | S | 4500 | 6.7 | 95 | 110 | 68 | 918 |
| | | | Road | D | — | — | — | — | — | — |
| | | | Cross Country | S | 4500 | 3.9 | 57 | 70 | 43 | 1490 |
| | | | Mud and Sand | S | 4500 | 2.5 | 36 | 30 | 19 | 1877 |

XS™




| | | | | | | | | | | |
|--------------------------------------|------------------|--------------------|--|-----------------|----------|---------|--------|---------|--------|------|
| 7.50 R16 TL | XS™ 116/114 N | YES ⁽¹⁾ | Measuring 6.00G | 16x 6.00 16J | 21.7 kg | 10 mm | 214 mm | 826 mm | 384 mm | 636 |
| | | | Road | S | 1250 | 5.3 | 77 | 140 | 87 | 277 |
| | | | Road | D | 1180 | 5.3 | 77 | 130 | 81 | 265 |
| | | | Cross Country | S | 800 | 1.8 | 26 | 65 | 40 | 377 |
| | | | Mud and Sand | S | 800 | 1.0 | 15 | 20 | 12 | 542 |
| 14.00 R 20 TL* | XS™ 160/157 F | YES ⁽¹⁾ | Measuring 10.00W Optional 9.0, 10.0, 10.00V | 20x10.00 20S | 95.5 kg | 16.5 mm | 369 mm | 1238 mm | 566 mm | 427 |
| | | | Road | S | 4500 | 7.0 | 100 | 80 | 50 | 813 |
| | | | Road | D | 4125 | 7.0 | 100 | 80 | 50 | 750 |
| | | | Cross Country | S | 3250 | 3.1 | 45 | 70 | 43 | 1146 |
| | | | Mud and Sand | S | 3250 | 1.6 | 23 | 30 | 19 | 1822 |
| 525/65 R 20.5 (20.5 R 20.5) TL | XS™ 173 F | YES | Measuring 16.00 | TUBELESS | 129.9 kg | 16.8 mm | 521 mm | 1200 mm | 548 mm | 442 |
| | | | Road | S | 6500 | 8.0 | 120 | 80 | 50 | 1121 |
| | | | Road | D | — | — | — | — | — | — |
| | | | Cross Country | S | 4300 | 3.8 | 55 | 70 | 30 | 1298 |
| | | | Mud and Sand | S | 4300 | 2.2 | 32 | 30 | 19 | 1698 |
| 24 R 20.5 TL | XS™ 176 F | YES ⁽¹⁾ | Measuring 18.00 | TUBELESS | 195 kg | 16.8 mm | 602 mm | 1374 mm | 620 mm | 388 |
| | | | Road | S | 7100 | 6.0 | 90 | 80 | 50 | 1563 |
| | | | Road | D | — | — | — | — | — | — |
| | | | Cross Country | S | 5500 | 3.4 | 49 | 70 | 30 | 1919 |
| | | | Mud and Sand | S | 5500 | 1.9 | 28 | 30 | 19 | 2920 |

All the pressures are given for nominal conditions. Extension of use may be allowed for specific needs. Please contact your Michelin sales representative.

⁽¹⁾ M+S marking by end 2014.

MICHELIN OFF-ROAD TYRE USE

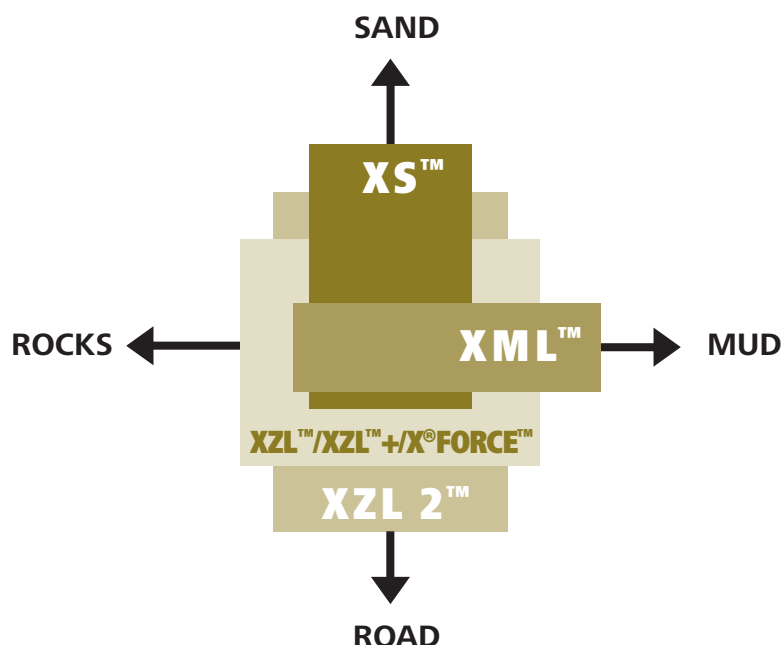

XS™



XML™



XZL™
XZL™+X®FORCE™



XZL 2™



OFF-ROAD PRODUCT AVAILABILITY

Size, tread, load index, speed symbol

| | XZL/XZL+X®FORCE™ | XZL 2 | XML | XS |
|-------------------------------|------------------|-------------|-------------|----------|
| 7.50 R 16 | 116N | | | 116/114N |
| 325/85 R 16 | 140K | | 137J (134K) | |
| 255/100 R 16 (9.00 R 16) | 126K (134J) | | | |
| 11.00 R 16 | 135K | | | |
| 275/80 R 20 (10.5 R 20) (MPT) | 128K | | | |
| 335/80 R 20 (12.5 R 20) (MPT) | 141K | | | |
| 365/80 R 20 (14.5 R 20) (MPT) | 152K | | | |
| 475/80 R 20 | | | 166G | |
| 365/85 R 20 | 164G | | | |
| 395/85 R 20 | 168G (161J) | 168K (164L) | 161G | |
| 10.00 R 20 | 146/143K | | | |
| 11.00 R 20 | 150/146K | | | |
| 12.00 R 20 | 154/149K | | 149/146J | |
| 14.00 R 20 | 164/160J (166G) | | 153G (149K) | 160/157F |
| 16.00 R 20 | 173G | | | |
| 525/65 R 20.5 (20.5 R 20.5) | | | | 173F |
| 24 R 20.5 | | | | 176F |
| 24 R 21 | 176G | | | |
| 425/65 R 22.5 | 165G | | | |
| 445/65 R 22.5 | 168G | | | |
| 13 R 22.5 | 154/150K | | | |
| 415/80 R 685 | | | 160K | |

Speed index

| SI | D | E | F | G | J | K | L | M | N |
|------|----|----|----|----|-----|-----|-----|-----|-----|
| Km/h | 65 | 70 | 80 | 90 | 100 | 110 | 120 | 130 | 140 |

Load index

| LI | Kg | LI | Kg | LI | Kg | LI | Kg |
|-----|------|-----|------|-----|------|-----|------|
| 106 | 950 | 124 | 1600 | 142 | 2650 | 160 | 4500 |
| 107 | 975 | 125 | 1650 | 143 | 2725 | 161 | 4625 |
| 108 | 1000 | 126 | 1700 | 144 | 2800 | 162 | 4750 |
| 109 | 1030 | 127 | 1750 | 145 | 2900 | 163 | 4875 |
| 110 | 1060 | 128 | 1800 | 146 | 3000 | 164 | 5000 |
| 111 | 1090 | 129 | 1850 | 147 | 3075 | 165 | 5150 |
| 112 | 1120 | 130 | 1900 | 148 | 3150 | 166 | 5300 |
| 113 | 1150 | 131 | 1950 | 149 | 3250 | 167 | 5450 |
| 114 | 1180 | 132 | 2000 | 150 | 3350 | 168 | 5600 |
| 115 | 1215 | 133 | 2060 | 151 | 3450 | 169 | 5800 |
| 116 | 1250 | 134 | 2120 | 152 | 3550 | 170 | 6000 |
| 117 | 1285 | 135 | 2180 | 153 | 3650 | 171 | 6150 |
| 118 | 1320 | 136 | 2240 | 154 | 3750 | 172 | 6300 |
| 119 | 1360 | 137 | 2300 | 155 | 3875 | 173 | 6500 |
| 120 | 1400 | 138 | 2360 | 156 | 4000 | 174 | 6700 |
| 121 | 1450 | 139 | 2430 | 157 | 4125 | 175 | 6900 |
| 122 | 1500 | 140 | 2500 | 158 | 4250 | 176 | 7100 |
| 123 | 1550 | 141 | 2575 | 159 | 4375 | | |



Learn more, flash
or go to trucks.michelin.eu
and www.youtube.com/michelintrucktyres